

# SUNNY BOY 6000TL-US / 7000TL-US / 8000TL-US / 9000TL-US / 10000TL-US / 11000TL-US



SB 6000TLUS-12 / SB 7000TLUS-12 / SB 8000TLUS-12 /  
SB 9000TLUS-12 / SB 10000TLUS-12 / SB 11000TLUS-12



**NOW AVAILABLE FOR 240 V**



## Innovative

- First transformerless SMA inverter to be certified in accordance with UL 1741
- First inverter with arc-fault circuit interrupter listed according to UL 1699B

## Economical

- Maximum efficiency of 98.7%
- Class-leading CEC efficiency of 98.5%
- Superior MPP tracking with OptiTrac™
- Transformerless, with H5 topology

## Reliable

- OptiCool™ active temperature management

## Convenient

- Integrated DC disconnect
- SMA Power Balancer for three-phase grid connection

## SUNNY BOY 6000TL-US / 7000TL-US / 8000TL-US / 9000TL-US / 10000TL-US / 11000TL-US

Transformerless design, maximum energy production

The Sunny Boy TL-US series is UL listed for North America and features SMA's innovative H5 topology, resulting in superior efficiencies of more than 98 percent and unmatched solar power production. The transformerless design reduces weight, increases the speed of payback and provides optimum value for any residential or decentralized commercial PV system. The Sunny Boy TL-US series for North America is the ideal choice in transformerless technology.

Technical data	Sunny Boy 6000TL-US 208 V	Sunny Boy 6000TL-US 240 V	Sunny Boy 7000TL-US 208 V	Sunny Boy 7000TL-US 240 V
<b>Input (DC)</b>				
Max. recommended PV power (@ module STC)	7500 W	7500 W	8750 W	8750 W
Max. DC power (@ $\cos \phi = 1$ )	6300 W	6200 W	7300 W	7300 W
Max. input voltage	600 V	600 V	600 V	600 V
MPP voltage range / rated input voltage	300 V - 480 V / 345 V	345 V - 480 V / 379 V	300 V - 480 V / 345 V	345 V - 480 V / 379 V
Min. input voltage / initial input voltage	300 V / 360 V	345 V / 360 V	300 V / 360 V	345 V / 360 V
Max. input current	20.9 A	18.1 A	24.4 A	21.1 A
Max. input current per string	20.9 A	18.1 A	24.4 A	21.1 A
Number of independent MPP inputs	1	1	1	1
Strings per MPP input @ Combiner Box	6	6	6	6
<b>Output (AC)</b>				
Rated power / max. apparent AC power	6000 W / 6000 VA	6000 W / 6000 VA	7000 W / 7000 VA	7000 W / 7000 VA
Nominal AC voltage / nominal AC voltage range	208 V / 183 V - 229 V	240 V / 211 V - 264 V	208 V / 183 V - 229 V	240 V / 211 V - 264 V
AC power frequency / range	60 Hz / 59.3 Hz ... 60.5 Hz		60 Hz / 59.3 Hz ... 60.5 Hz	
Max. output current	28.8 A	25 A	33.7 A	29.2 A
Power factor at rated power	1	1	1	1
Feed-in phases / connection phases	1 / 2	1 / 2	1 / 2	1 / 2
<b>Efficiency</b>				
CEC efficiency / max. efficiency	98 % / 98.6 %	98.5 % / 98.7 %	98 % / 98.6 %	98.5 % / 98.7 %
<b>Protective devices</b>				
DC reverse polarity protection	●	●	●	●
AC short-circuit current capability	●	●	●	●
Galvanic isolation	—	—	—	—
All-pole-sensitive residual-current monitoring unit	●	●	●	●
Arc-fault circuit interrupter (according to UL 1699B)	●	●	●	●
Protection class	I	I	I	I
Overvoltage category	IV	IV	IV	IV
<b>General data</b>				
Dimensions (W / H / D)	470 / 615 / 240 mm (18.4 / 24.1 / 9.5 inch)		470 / 615 / 240 mm (18.4 / 24.1 / 9.5 inch)	
Dimensions of DC Disconnect (W / H / D)	187 / 297 / 190 mm (7.28 / 11.7 / 7.5 inch)		187 / 297 / 190 mm (7.28 / 11.7 / 7.5 inch)	
Weight	35 kg / 78 lb	35 kg / 78 lb	35 kg / 78 lb	35 kg / 78 lb
Weight of DC Disconnect	3.5 kg / 8 lb	3.5 kg / 8 lb	3.5 kg / 8 lb	3.5 kg / 8 lb
Operating temperature range	-40 °C ... +60 °C / -40 °F ... +140 °F		-40 °C ... +60 °C / -40 °F ... +140 °F	
Noise emission (typical)	46 dB(A)	46 dB(A)	46 dB(A)	46 dB(A)
Self-consumption (night)	0.15 W	0.15 W	0.15 W	0.15 W
Topology	Transformerless H5	Transformerless H5	Transformerless H5	Transformerless H5
Cooling concept	OptiCool	OptiCool	OptiCool	OptiCool
Degree of protection	NEMA 3R	NEMA 3R	NEMA 3R	NEMA 3R
Degree of protection of connection area	NEMA 3R	NEMA 3R	NEMA 3R	NEMA 3R
Max. permissible value for relative humidity (non-condensing)	100 %	100 %	100 %	100 %
<b>Features</b>				
DC connection	Screw terminal	Screw terminal	Screw terminal	Screw terminal
AC connection	Screw terminal	Screw terminal	Screw terminal	Screw terminal
Display	Text line	Text line	Text line	Text line
Interface: RS485 / Bluetooth	○ / ○	○ / ○	○ / ○	○ / ○
Warranty: 10 / 15 / 20 years	● / ○ / ○	● / ○ / ○	● / ○ / ○	● / ○ / ○
Certificates and approvals (more available on request)	UL1741, UL1998, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA C22.2 107.1-1, UL 1699B			
Type designation	SB 6000TLUS-12		SB 7000TLUS-12	

Sunny Boy 8000TL-US 208 V	Sunny Boy 8000TL-US 240 V	Sunny Boy 9000TL-US 208 V	Sunny Boy 9000TL-US 240 V
10000 W	10000 W	11250 W	11250 W
8400 W	8300 W	9400 W	9300 W
600 V	600 V	600 V	600 V
300 V - 480 V / 345 V	345 V - 480 V / 379 V	300 V - 480 V / 345 V	345 V - 480 V / 379 V
300 V / 360 V	345 V / 360 V	300 V / 360 V	345 V / 360 V
27.9 A	24.1 A	31.4 A	27.1 A
27.9 A	24.1 A	31.4 A	27.1 A
1	1	1	1
6	6	6	6

8000 W / 8000 VA		9000 W / 9000 VA	
208 V / 183 V - 229 V	240 V / 211 V - 264 V	208 V / 183 V - 229 V	240 V / 211 V - 264 V
60 Hz / 59.3 Hz ... 60.5 Hz	60 Hz / 59.3 Hz ... 60.5 Hz	60 Hz / 59.3 Hz ... 60.5 Hz	60 Hz / 59.3 Hz ... 60.5 Hz
38.5 A	33.4 A	43.3 A	37.5 A
	1		1
	1 / 2		1 / 2

98 % / 98.6 %	98 % / 98.6 %	98 % / 98.6 %	98 % / 98.7 %
---------------	---------------	---------------	---------------

●	●
●	●
—	—
●	●
●	●
I	I
IV	IV


470 / 615 / 240 mm (18.4 / 24.1 / 9.5 inch)	470 / 615 / 240 mm (18.4 / 24.1 / 9.5 inch)
187 / 297 / 190 mm (7.28 / 11.7 / 7.5 inch)	187 / 297 / 190 mm (7.28 / 11.7 / 7.5 inch)
35 kg / 78 lb	35 kg / 78 lb
3.5 kg / 8 lb	3.5 kg / 8 lb
-40 °C ... +60 °C / -40 °F ... +140 °F	-40 °C ... +60 °C / -40 °F ... +140 °F
46 dB(A)	46 dB(A)
0.15 W	0.15 W
Transformerless H5	Transformerless H5
OptiCool	OptiCool
NEMA 3R	NEMA 3R
NEMA 3R	NEMA 3R
100 %	100 %

Screw terminal	Screw terminal
Screw terminal	Screw terminal
Text line	Text line
○ / ○	○ / ○
● / ○ / ○	● / ○ / ○

UL1741, UL1998, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA C22.2 107.1-1, UL 1699B

Technical data	Sunny Boy 10000TL-US 208 V	Sunny Boy 10000TL-US 240 V	Sunny Boy 11000TL-US 240 V
<b>Input (DC)</b>			
Max. recommended PV power (@ module STC)	12500 W	12500 W	13750 W
Max. DC power (@ cos φ = 1)	10500 W	10350 W	11500 W
Max. input voltage	600 V	600 V	600 V
MPP voltage range / rated input voltage	300 V - 480 V / 345 V	345 V - 480 V / 379 V	345 V - 480 V / 379 V
Min. input voltage / initial input voltage	300 V / 360 V	345 V / 360 V	345 V / 360 V
Max. input current	35 A	30.2 A	33.3 A
Max. input current per string	35 A	30.2 A	33.3 A
Number of independent MPP inputs	1	1	1
Strings per MPP input @ Combiner Box	6	6	6
<b>Output (AC)</b>			
Rated power / max. apparent AC power	10000 W / 10000 VA		11000 W / 11000 VA
Nominal AC voltage / nominal AC voltage range	208 V / 183 V - 229 V	240 V / 211 V - 264 V	240 V / 211 V - 264 V
AC power frequency / range	60 Hz / 59.3 Hz ... 60.5 Hz	60 Hz / 59.3 Hz ... 60.5 Hz	60 Hz / 59.3 Hz ... 60.5 Hz
Max. output current	48.1 A	41.7 A	45.8 A
Power factor at rated power	1		1
Feed-in phases / connection phases	1 / 2		1 / 2
<b>Efficiency</b>			
CEC efficiency / max. efficiency	97.5 % / 98.6 %	98 % / 98.7 %	98 % / 98.7 %
<b>Protective devices</b>			
DC reverse polarity protection	●	●	●
AC short-circuit current capability	●	●	●
Galvanic isolation	—	—	—
All-pole-sensitive residual-current monitoring unit	●	●	●
Arc-fault circuit interrupter (according to UL 1699B)	●	●	●
Protection class	I	I	I
Overvoltage category	IV		IV
<b>General data</b>			
Dimensions (W / H / D)	470 / 615 / 240 mm (18.4 / 24.1 / 9.5 inch)		
Dimensions of DC Disconnect (W / H / D)	187 / 297 / 190 mm (7.28 / 11.7 / 7.5 inch)		
Weight	35 kg / 78 lb		
Weight of DC Disconnect	3.5 kg / 8 lb		
Operating temperature range	-40 °C ... +60 °C / -40 °F ... +140 °F		
Noise emission (typical)	46 dB(A)		46 dB(A)
Self-consumption (night)	0.15 W		0.15 W
Topology	Transformerless H5		Transformerless H5
Cooling concept	OptiCool		OptiCool
Degree of protection	NEMA 3R		NEMA 3R
Degree of protection of connection area	NEMA 3R		NEMA 3R
Max. permissible value for relative humidity (non-condensing)	100 %		100 %
<b>Features</b>			
DC connection	Screw terminal		Screw terminal
AC connection	Screw terminal		Screw terminal
Display	Text line		Text line
Interface: RS485 / Bluetooth	○ / ○		○ / ○
Warranty: 10 / 15 / 20 years	● / ○ / ○		● / ○ / ○
Certificates and approvals (more available on request)	UL1741, UL1998, IEE1547, FCC Part 15 (Class A & B), CAN/CSA C22.2 107.1-1, UL 1699B		
NOTE: US inverters ship with gray lids			
Type designation	SB 10000TLUS-12		SB 11000TLUS-12

SUNNYBOY®/11TLUS124613 Sunny Boy, OptiCool, H5 and SMA are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors. Printed on chlorine-free paper.

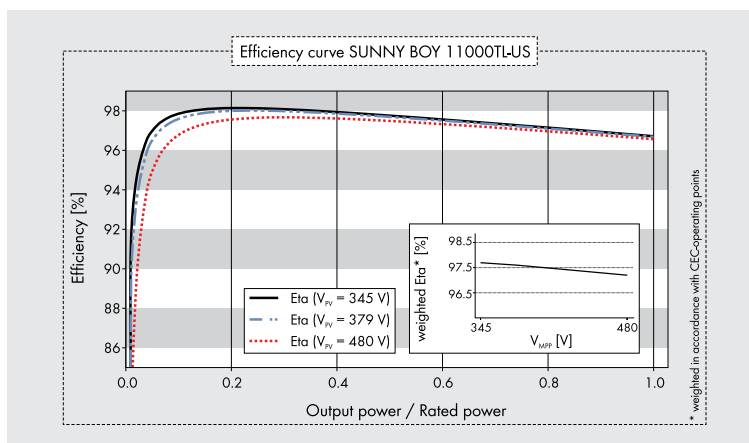

## Accessories



Sunny Boy Combiner Box  
SBCBT6-10



Bluetooth Piggy-Back  
BTPBINV-NR  
with External Antenna  
BTPB-EXTANT-NR



Interface RS485  
485USPB-NR



SMA Power Balancer Set  
PBL-SBUS-10-NR

● Standard feature ○ Optional feature — Not available  
Data at nominal conditions